
Laserliner®


AutoCross-Laser 2 XP




Cross-line and 5-point laser with hand receiver mode and magnetic wall bracket

Rev.1114

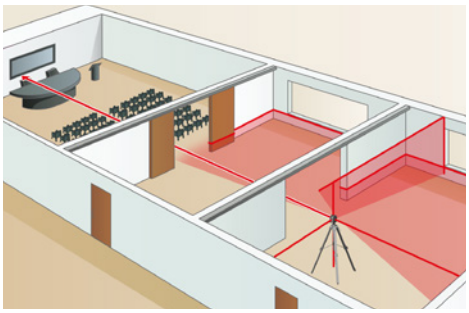

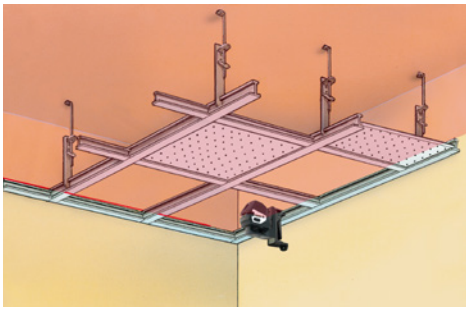


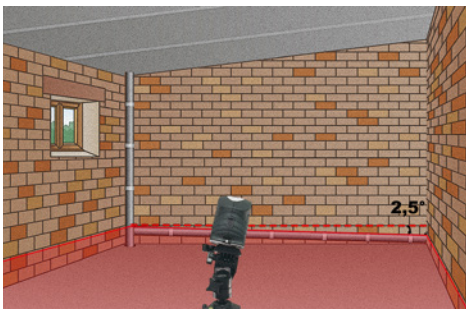

- **PowerBright-Laser⁺:** Special high-performance laser diodes project extremely visible laser lines
- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- The **5 laser points** are placed each in 90° on the horizontal and vertical level of the laser lines. On the edges of the laser lines there are formed 3 intercept points out of laser line and point.
- **The plum and ceiling points** allow markings to be easily transferred from the floor to the ceiling.
- The **magnetic wall bracket** allows the unit to be used as a stand-alone device or in combination with other devices – on walls and attached to magnetic objects
- Ideal for **mounting on drywall construction profiles**
- **Automatic Level**: automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- **Individually switchable** laser lines
- **Out-Of-Level**: Is indicated by optical and acoustic signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 50 m radius – ideal for all interior and exterior applications.
- **Transport lock:** A pendelum lock protects unit during transport.

TECHNICAL DATA
ACCURACY 2 mm per 10 m
SELF-LEVELLING RANGE ± 3°
LASER WAVELENGTH 635 nm
LASER line lasers, class 2 < 1 mW
POWER SUPPLY 4 x 1.5V alkaline batteries
OPERATING TIME approx. 10 hrs
WORKING TEMPERATURE 0°C … +45°C
STORAGE TEMPERATURE -10°C … +70°C
WATER AND DUST PROTECTION IP 54
WEIGHT 550 g (without wall bracket)
DIMENSIONS ACL 2 XP 130 x 105 x 70 mm (W x H x D)

1H 1V





Stand-alone device or in combination: wall- and clamp holder



Height and position of the measuring device easily adjustable



Magnetic



AutoCross-Laser 2 XP
including carrying case
+ magnetic wall bracket
+ batteries

Packing dimension (W x H x D)
440 x 370 x 110 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
AutoCross-Laser 2 XP	060.101A	4 021563 691432	1

Laser 635 nm · 2 · PowerBright+ LASER · AUTOMATIC LEVEL · lock · RX READY · magnetic · 1/4" · 5/8" · 4x AA · HARD

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Tel. +49 2932 638-300 · Fax +49 2932 638-333 · laserliner@umarex.de · www.laserliner.com