
Laserliner


X1-Laser



360° line laser with hand-held receiver mode and magnetic clamp and wall bracket for varied applications

- Green 360° line laser
- Very bright, green laser cross
- Automatic alignment thanks to magnetically damped pendulum system
- Additional slope function
- Optimised for work close to the ceiling
- Individually switchable laser lines
- GRX-Ready: integrated handheld receiver mode
- Magnetic clamp and wall bracket – ideal for horizontal and vertical mounting on drywall construction profiles

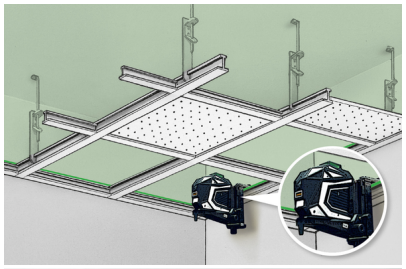

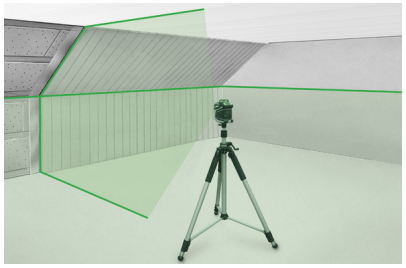


TECHNICAL SPECIFICATIONS	
SELF-LEVELLING RANGE	± 3°
ACCURACY	± 0.2 mm / m
LEVELLING	automatic
VISIBILITY (typical)*	40 m
WORKING RANGE WITH HAND RECEIVER	(depends on how the technology affects the difference in brightness) 60 m
LASER WAVELENGTH	515 nm
LASER CLASS	2 / < 1 mW (EN 60825-1:2014/AC:2017)
POWER SUPPLY	Li-ion battery pack 3.7V / 1.7Ah Power supply 5V/DC / 2000mAh
OPERATING TIME	approx. 10 hours
OPERATING CONDITIONS	0°C … 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-10°C … 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	122 mm x 121 mm x 75 mm
WEIGHT	638 g (incl. battery pack)

* at up to 300 lux













X1-Laser	**Item no.** 031.500A	**EAN-CODE** 4021563709663	**PU** 1

UMAREX GmbH & Co. KG • Donnerfeld 2 • 59757 Arnsberg • Germany • Tel. +49 2932 638-300 • Fax +49 2932 638-333 • info@laserliner.com • www.laserliner.com