
Laserliner®


SuperSquare-Laser 4 Plus




90° line laser for alignment work on floors and walls

Rev.0316

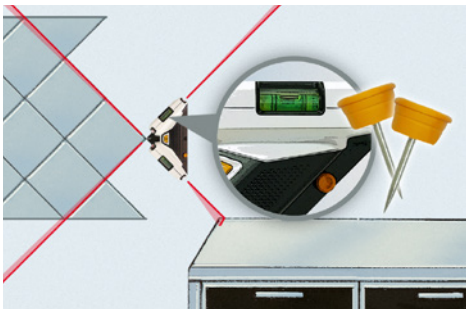

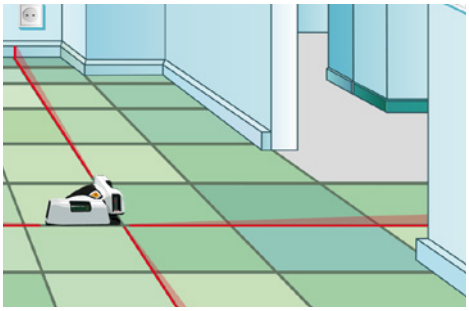

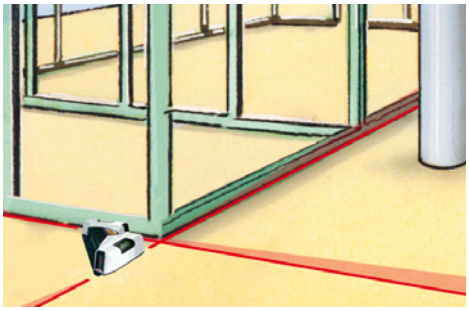

- The **4 highly visible laser lines** are ideally suited to floor alignment.
- **Vertical and horizontal levelling** on walls
- The applied **lay edges** and **contact surface** make it easy to position floor tiles.
- Optimal alignment **of areas which are difficult to access**
- **Clean application** on all surfaces **– with pins as well**
- **Vials** to adjust the device
- Can be used as a **laser spirit level**
- Allows for measurement of sloped planes

TECHNICAL DATA
ANGLE PRECISION ± 0,5 mm / 1 m
OPERATING RANGE (depending on brightness of area) 15 m
WORKING TEMPERATURE 0°C…+ 50°C
STORAGE TEMPERATURE -10°C…+ 70°C
LASER WAVELENGTH 635 nm
LASER line lasers, class 2 < 1 mW
POWER SUPPLY 2 x 1.5V AA
OPERATING TIME 15 h
DIMENSIONS (W x H x D) 200 x 48 x 100 mm
WEIGHT incl. batteries 240 g



Lay edges and contact surface



Bubble levels to adjust the device



Inclusive pins



SuperSquare-Laser 4 Plus
including carrying case
+ laser enhancement glasses
+ pins
+ batteries (2 x 1,5V AA)

Packing dimension (W x H x D)
340 x 275 x 85 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
SuperSquare-Laser 4 Plus	081.135A	4 021563 695249	5

Laser 635 nm · 2 · 2 x AA

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Tel. +49 2932 638-300 · Fax +49 2932 638-333 · laserliner@umarex.de · www.laserliner.com