


Laserliner

DigiLevel Pro 120

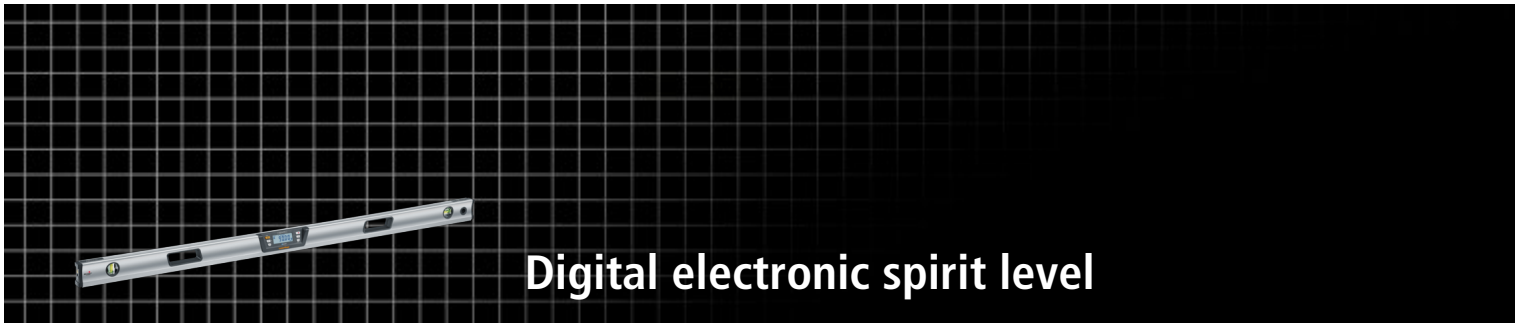

- Integrated dot laser for optical extension
- Calibration: permanent accuracy via reverse measurement
- Horizontal vial
- Vertical vial
- Digital bubble level
- Gradient function
- Angle reference function
- Hold function
- Bluetooth® interface
- Units of measure: ° degrees, %, mm/m
- Adhesion magnets
- Milled measuring surfaces

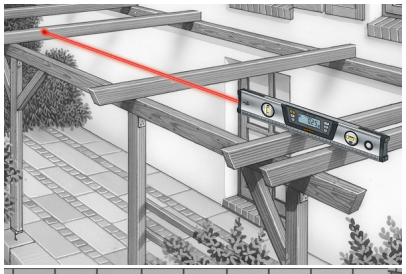


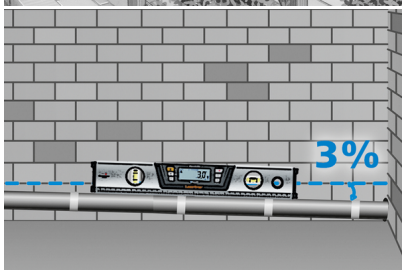

TECHNICAL SPECIFICATIONS

ELECTRONIC MEASURING PRECISION	± 0.05° at 0° … 1° ± 0.1° at 1° … 89° ± 0.05° at 89° … 90°
DISPLAY ACCURACY	2 decimal places
VIAL ACCURACY	± 0.5 mm / m
LASER WAVELENGTH	635 nm
LASER CLASS	2 / < 1 mW (EN 60825-1:2014/AC:2017)
PROTECTION CLASS	IP 54
POWER SUPPLY	2 x 1.5V LR03 (AAA)
DIMENSIONS (W X H X D)	1200 mm x 63 mm x 33 mm
WEIGHT	1360 g (incl. batteries)



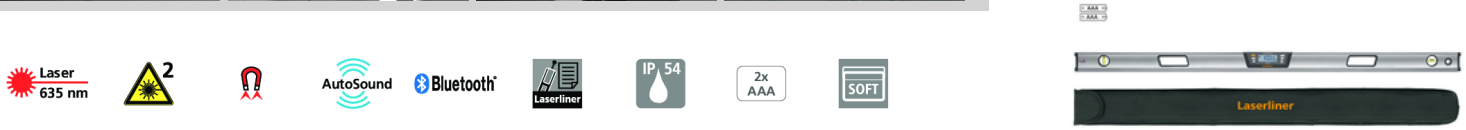

DigiLevel Pro 120	**ORDER NO.** 081.275A	**EAN-CODE** 4021563712977	**PU** 1

UMAREX GmbH & Co. KG • Donnerfeld 2 • 59757 Arnsberg • Germany • Tel. +49 2932 638-300 • Fax +49 2932 638-333 • info@laserliner.com • www.laserliner.com